

# 10/12T Gooseneck Commercial Series

## Pierced Frame


Gooseneck Trailers

Specifications	
• G.V.W.R. - 23,900#	• Axle - (2) 10,000# Oil-Bath Electric Brake Axle
• G.A.W.R. (Each Axle) - 10,000#	• Suspension - 3" HD-Leaf Spring w/ Equalizer
• Coupler - 2-5/16" - Adjustable Gooseneck	• Tires - ST235/80R16 Load Range E
• Safety Chain - 3/8" Grade 43 w/ Hooks	• Wheel - Dually 16" 8-Bolt Grey (8 on 6.5 Pattern)
• Jack - Dual Bolt-On 10K Side Wind Drog Leg	• Deck - 2" Pressure Treated Pine
• Frame- 12" Structural I-Beam	• Lights - L.E.D. Stop, Tail, & Turn
• Frame Style - Pierced Frame Construction	• Vehicle Plug - 7-Way RV w/ Breakaway & SnapNSeal
• Crossmembers - 3" Channel w/ 16" Centers	• Paint Prep - 3-Stage Clean-Up & Prime Coat
• Side Rails - 6" Channel w/ Rub Rail	• Paint - Durable High Solids Acrylic Enamel
• Ramps - 5' HD-EZ Runner Style w/ Spring Assist & Lockable Ramp Bars	

Standard Features	
• 5' Self-Cleaning Dovetail	• Spare Tire Mount in Neck
• Lockable Neck Mounted Toolbox w/ Gas Shocks	
• Full-Length Diamond Plate Drive-Over Fenders	

Optional Features	
• Box End Tail or Paver Dovetail	• Tie Down Options
• Deck Over Neck/Steel Floor	• Wood C. Ramp/Headache Rack
• Jack, Axle & Brake Upgrades	• Spare Mount & Wheel Options

Dimensions						
Weight/Length	A	B	C	D	E	Dove
5,900# - 20'	240"	142"	91"	34"	102"	Boxend
6,200# - 25'	300"	185"	91"	34"	102"	60"
6,400# - 30'	360"	215"	91"	34"	102"	60"
6,750# - 33'	396"	233"	91"	34"	102"	60"
6,950# - 35'	420"	245"	91"	34"	102"	60"
7,300# - 37'	444"	286"	91"	34"	102"	60"
7,500# - 40'	480"	310"	91"	34"	102"	60"

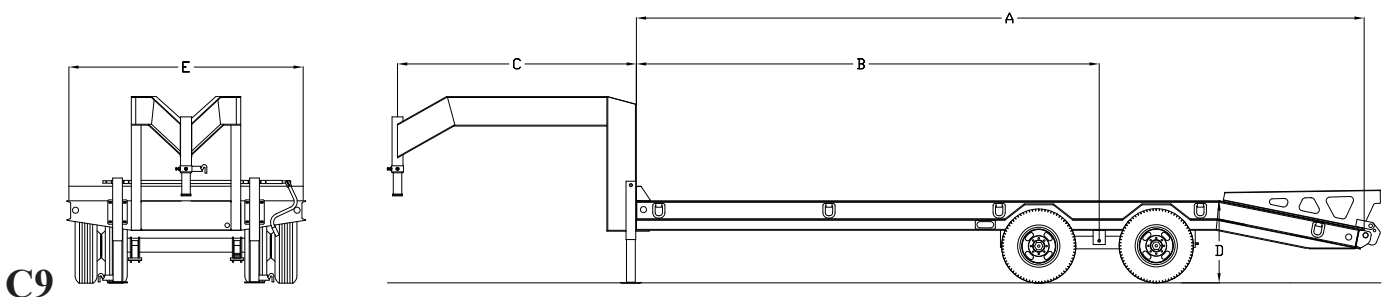

C9