

# 10/12T Tagalong Workhorse-X Series

## Pierced Frame


Tagalong Trailers

Specifications	
• G.V.W.R. - 23,900#	• Axle - (2) 10,000# Oil-Bath Electric Brake
• G.A.W.R. (Each Axle) - 10,000#	• Suspension - 3" HD-Leaf Spring w/ Equalizer
• Coupler - Adjustable 3-Position Pintle Ring	• Tires - ST235/80R16 Load Range E
• Safety Chain - 3/8" Grade 43 w/ Hooks	• Wheel - Dually 16" 8-Bolt Grey (8 on 6.5 Pattern)
• Jack - Dual Bolt-On 10K Side Wind Drog Leg	• Deck - 2" Pressure Treated Pine
• Frame- 12" Structural I-Beam	• Lights - L.E.D. Stop, Tail, & Turn
• Frame Style - Pierced Frame Construction	• Vehicle Plug - 7-Way RV w/ Breakaway & SnapNSeal
• Crossmembers - 3" Channel w/ 16" Centers	• Paint Prep - 3-Stage Clean-Up & Prime Coat
• Side Rails - 6" Channel w/ Rub Rail	• Paint - Durable High Solids Acrylic Enamel
• Ramps - 5' Heavy Duty X-Ramps w/ 2-Way Spring Assist & Locking Ramp Bars	

Standard Features	
• 5' Self-Cleaning Dovetail	• Sealed Wiring Harness
• Lockable Neck Mounted Toolbox	
• Full-Length Diamond Plate Drive-Over Fenders	

Optional Features	
• Pop-Up Dovetail	• Tie Down Options
• Diamond Plate Steel Floor	• Headache Rack
• Jack, Axle & Brake Upgrades	• Spare Mount & Wheel Options

Dimensions						
Weight/Length	A	B	C	D	E	Dove
6,000# - 25'	300"	185"	68"	34"	102"	60"
6,200# - 30'	360"	215"	68"	34"	102"	60"
6,550# - 33'	396"	233"	68"	34"	102"	60"
<b>6,800# - 35'**</b>	420"	245"	68"	34"	102"	60"
<b>7,300# - 40'**</b>	480"	310"	68"	34"	102"	60"
<b>** 35' &amp; 40' is custom built to order and require certain specifications sent in**</b>						

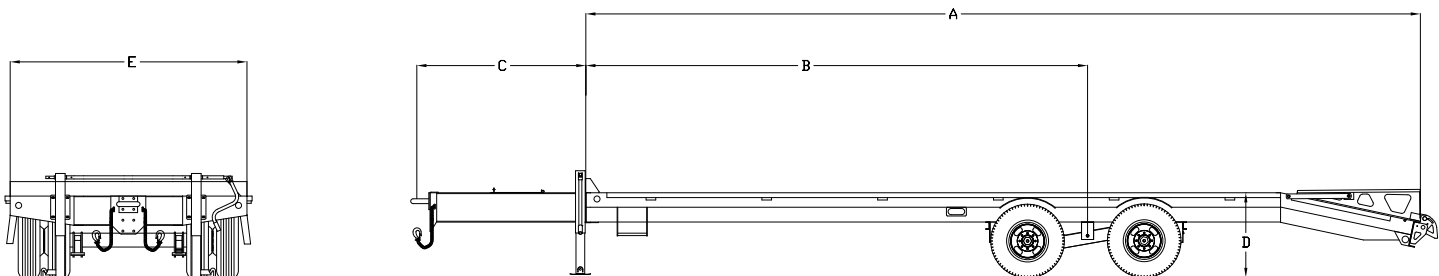

D9