

# 15T Tagalong Commercial Series

## Pierced Frame


Tagalong Trailers

Specifications	
• G.V.W.R. - 32,500#	• Axle - (2) 15,000# Oil-Bath Electric Brake
• G.A.W.R. (Each Axle) - 15,000#	• Suspension - HDSS (9700 Hutch-Style)
• Coupler - Adjustable 3-Position Pintle Ring	• Tires - ST215/75R17.5 Load Range H
• Safety Chain - 7/16" Grade 70 w/ Hooks	• Wheel - Dually 6.75x17.5 Rim (8 on 275mm Pattern)
• Jack - Dual Bolt-On 25K 2-Speed	• Deck - 2" Oak
• Frame- 14" Structural I-Beam	• Lights - L.E.D. Stop, Tail, & Turn
• Frame Style - Pierced Frame Construction	• Vehicle Plug - 7-Way Semi Style w/ SnapNSeal
• Crossmembers - 5" Channel w/ 16" Centers	• Paint Prep - 3-Stage Clean-Up & Prime Coat
• Side Rails - 8" Channel w/ D-Rings	• Paint - Durable High Solids Acrylic Enamel
• Ramps - 5' HD-EZ Lift Runner Style w/ Spring Assist & Lockable Ramp Bars	

Standard Features	
• 5' Wood-Covered Dovetail	• Sealed Wiring Harness
• Lockable Tongue Mounted Toolbox	
• Full-Length Diamond Plate Drive-Over Fenders	

Optional Features	
• Paver Dovetail/Air Brakes	• Maxx D-Ring Package
• 36" Hydraulic Ramps (6' & 8')	• Wood-Covered Ramps
• Paver Dovetail & 6' WC Ramps	• Underbody Spare Tire Mount

Dimensions						
Weight/Length	A	B	C	D	E	Dove
6,200# - 25'	300"	185"	68"	34"	102"	60"
6,400# - 30'	360"	215"	68"	34"	102"	60"
6,750# - 33'	396"	233"	68"	34"	102"	60"
6,950# - 35'**	420"	245"	68"	34"	102"	60"
7,500# - 40'**	480"	310"	68"	34"	102"	60"
** 35' & 40' is custom built to order and require certain specifications sent in**						

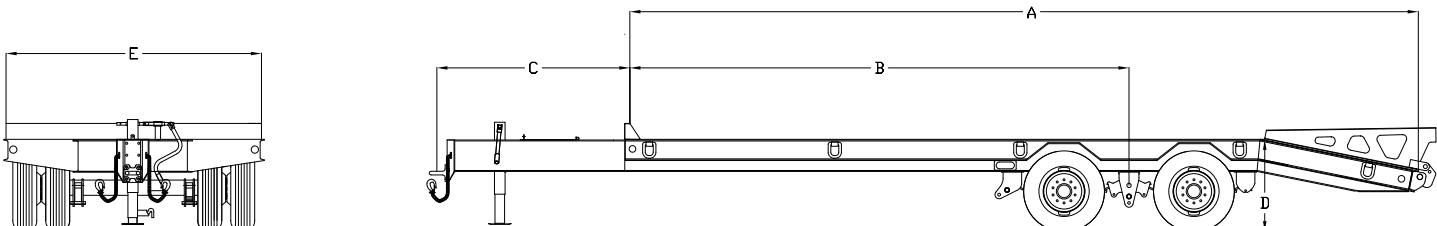

D13

FET Tax Required