

20T (Commercial) Tilt Series

Fabricated-Deck


| Specifications | |
|---|---|
| • G.V.W.R. - 45,000# | • Axle - (2) 20,000# Oil-Bath Air Brake |
| • G.A.W.R. (Each Axle) - 22,500# | • Suspension - HD Hutch 9700-Style |
| • Coupler - 3" - Adjustable Pintle Ring | • Tires - ST215/75R17.5 Load Range H |
| • Safety Chain - 7/16" Grade 70 w/ Hooks | • Wheel - Dually 17.5" 8-Bolt Grey (8 on 275mm Pa.) |
| • Jack - Bolt-On 25K 2-Speed Landing Gear | • Deck - 2" Rough Cut Oak |
| • Frame- 14" Structural I-Beam | • Lights - L.E.D. Stop, Tail, & Turn |
| • Tilt Deck - Custom Fabricated Beam w/ Lock | • Vehicle Plug - 7-Way Semi w/ SnapNSeal |
| • Crossmembers - 4" Channel w/ 16" Center | • Paint Prep - 3-Stage Clean-Up & Prime Coat |
| • Side Rails - 8" Channel w/ D-Rings | • Paint - Durable High Solids Acrylic Enamel |
| • Loading - Beveled Approach Plate w/ Recessed Lights & Tube Bumper | |

Tilt Trailers

| Standard Features | |
|--|----------------------------|
| • 5' Low Angle Dovetail | • Cushioning Tilt Cylinder |
| • Lockable Tongue Mounted Toolbox | |
| • Full-Length Diamond Plate Drive-Over Fenders | |
| • Lever Unlock/Self-Locking Tilt Deck Latch | |

| Optional Features | |
|-----------------------------------|-----------------------|
| • Spare Mount/Steel Floor Upgrade | • Maxx D-Ring Package |

| Dimensions | | | | | | |
|---------------|------|------|-------|-----|------|------|
| Weight/Length | A | B | C | D | E | Dove |
| 7,000# - 25' | 300" | 148" | 73.5" | 36" | 102" | 60" |
| 7,200# - 29' | 348" | 172" | 73.5" | 36" | 102" | 60" |

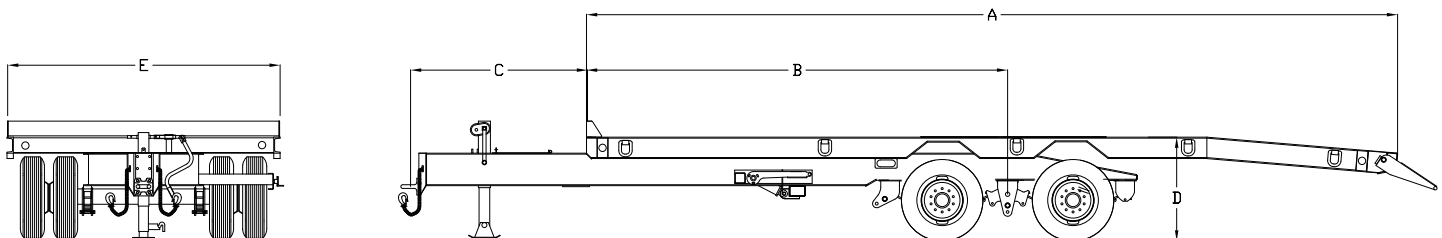

E13

FET Tax Required