





HGL-T Series (Tandem Axle)



Specifications			
Bed Models	6x10'	6x12'	6x14' or 6x16'
Load Capacity (Lb.)	7,000 or 10,000#	7,000 or 10,000#	10,000#
Deck Width	72"	72"	72"
Deck Length	10'	12'	14' or 16'
Trailer Weight (Lb.)	3,400#(7K) or 3,500#(10K)	3,450#(7K) or 3,550#(10K)	3,650#(14') or 3,850#(16')
Lift Mechanism	Hydraulic-Fluid Pump	Hydraulic-Fluid Pump	Hydraulic-Fluid Pump
Number of Axles	Tandem	Tandem	Tandem
Wheel Size	ST225/75R15(7K) or ST235/80R16(10K)		ST235/80R16
Wheel Bolt Pattern	6x5.5" (7K) or 8x6.5" (10K)		8x6.5"
Brakes/Hyd. Pump	Electric	Electric	Electric
Coupler Ball Size	2-5/16" Bolt-On	2-5/16" Bolt-On	2-5/16" Bolt-On
Suspension	® TorsionSlide (Rubber) w/ Camber and Toe Adjustments		
Deck (7K Models)	11 Ga. Diamond Plate w/ Corner and Middle Chain Slots (6 Total)		
Deck (10K Models)	3/16" Diamond Plate w/ Corner and Middle Chain Slots (6 Total)		
Electrical	• Full L.E.D. Lighting w/ 7-Way RV Plug, Breakaway & SnapNSeal Harness		
Storage	• Dual Tongue Storage Boxes - #1 (Pump/Battery) & #2 (Open Storage)		

Optional Features	
• Spare Mount/ Extra Toolbox	• Solid Side & Deck Options
• TieDown Packages	• Surge Brakes/XD Suspension
• Battery Charger Options	• Hydraulic Jack w/ SolarPanel

Dimensions						
Length	A	B	C	D	E	F
5x10'	120"	60"	64"	13"	72"	100"
6x12'	132"	75"	64"	13"	72"	100"
6x14'	144"	75"	64"	13"	72"	100"
6x16'	168"	87"	64"	13"	72"	100"

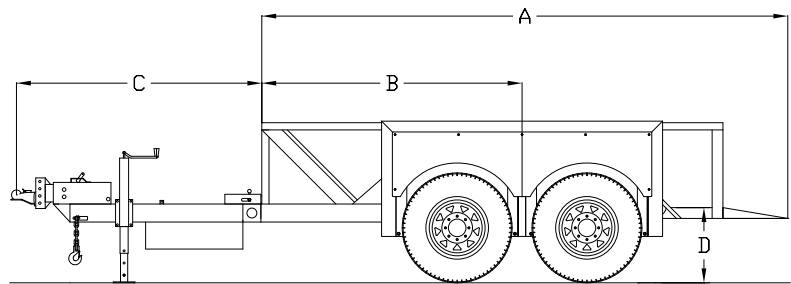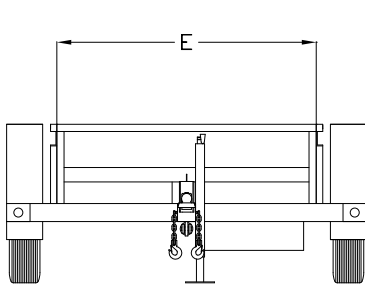

H3