



LST-X Utility Series

(Landscape Tandem Extreme)

Specifications	
• G.V.W.R. - 7,000#	• Axle - (2) 3,500# Cambered Electric Brake
• G.A.W.R. (Each Axle) - 3,500#	• Suspension - Multi-Leaf Spring w/ Equalizer
• Coupler - 2" - Adjustable Bolt-On	• Tires - ST205/75R15 Load Range C
• Safety Chain - 8/0 Grade 30 w/ Hooks	• Wheel - 15" 5-Bolt White Spoke (5 on 4.5 Pattern)
• Jack - 2K Top-Wind Pole	• Deck - 2" Pressure Treated Pine
• Tongue - 4x3x1/4" Angle	• Lights - L.E.D. Stop, Tail, & Turn
• Frame - 3x2x3/16" Angle (3x4x1/4" Angle 18'+)	• Vehicle Plug - 7-Way RV w/ Breakaway & SnapNSeal
• Crossmembers - 3x2x3/16" Angle w/ 24" Centers	• Paint Prep - 5-Stage Super Blast Treatment
• Top Rail - 2x3" 11Ga. Tube	• Paint - Super Durable Powdercoat
• Uprights - 2x2x1/8" Angle w/ Spare Mount	• Gate - 4' HD-X Rental Style w/ Angle Runners
• Fenders - 9x72" - Diamond Plate w/ Steel Backs	• Gate Lock - CNC Machined Lockable Pin Latch
Bumper - 2x4" 14Ga. CNC Laser Tubed w/ Concealed Tag Mount & Integrated EZ-Shock Gate Assist	

Optional Features	
• Tie Down Packages	• Multiple Wheel Option
• Higher & Covered Side Rails	• Jack Upgrades
• Bolt-On Coupler Upgrades	• Surge Brake Upgrade

Dimensions					
Weight/Length	A	B	C	D	E
1,340# - 10'	120"	81.5"	38.5"	20"	76"
1,430# - 12'	144"	93"	38.5"	20"	76"
1,520# - 14'	168"	104"	38.5"	20"	76"
1,610# - 16'	192"	114"	38.5"	20"	76"
1,700# - 18'	216"	124"	38.5"	20"	76"
1,790# - 20'	240"	134"	38.5"	20"	76"
1,880# - 22'	264"	144"	38.5"	20"	76"
* 7' Wide Models Only - E=82" & 75-150# Added to 6' Wide Models*					

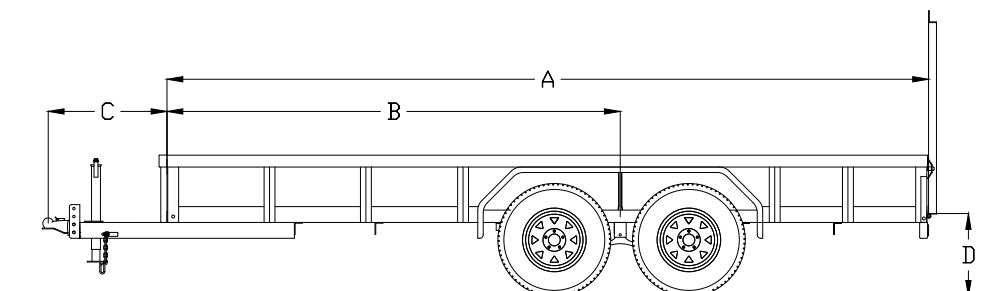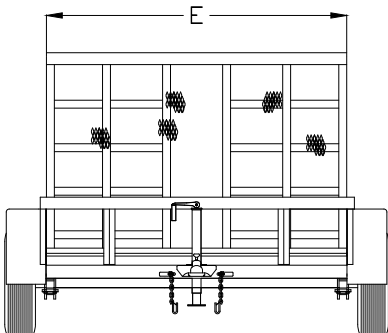

A15