

10/12T Tagalong Commercial Series

Pierced Frame

Specifications

• G.V.W.R. - 23,900#	• Axle - (2) 10,000# Oil-Bath Electric Brake
• G.A.W.R. (Each Axle) - 10,000#	• Suspension - 3" HD-Leaf Spring w/ Equalizer
• Coupler - Adjustable 3-Position Pintle Ring	• Tires - ST235/80R16 Load Range E
• Safety Chain - 3/8" Grade 43 w/ Hooks	• Wheel - Dually 16" 8-Bolt Grey (8 on 6.5 Pattern)
• Jack - Dual Bolt-On 10K Side Wind Drog Leg	• Deck - 2" Pressure Treated Pine
• Frame- 12" Structural I-Beam	• Lights - L.E.D. Stop, Tail, & Turn
• Frame Style - Pierced Frame Construction	• Vehicle Plug - 7-Way RV w/ Breakaway & SnapNSeal
• Crossmembers - 3" Channel w/ 16" Centers	• Paint Prep - 3-Stage Clean-Up & Prime Coat
• Side Rails - 6" Channel w/ Rub Rail	• Paint - Durable High Solids Acrylic Enamel
• Ramps - 5' HD-EZ Runner Style w/ Spring Assist & Lockable Ramp Bars	

Standard Features

- 5' Self-Cleaning Dovetail
- Sealed Wiring Harness
- Lockable Neck Mounted Toolbox
- Full-Length Diamond Plate Drive-Over Fenders



Optional Features

- Box End Tail or Paver Dovetail
- Tie Down Options
- Diamond Plate Steel Floor
- Wood C. Ramp/Headache Rack
- Jack, Axle & Brake Upgrades
- Spare Mount & Wheel Options

Dimensions

Weight/Length	A	B	C	D	E	Dove
6,200# - 25'	300"	185"	68"	34"	102"	60"
6,400# - 30'	360"	215"	68"	34"	102"	60"
6,750# - 33'	396"	233"	68"	34"	102"	60"
6,950# - 35'**	420"	245"	68"	34"	102"	60"
7,500# - 40'**	480"	310"	68"	34"	102"	60"

** 35' & 40' is custom built to order and require certain specifications sent in**

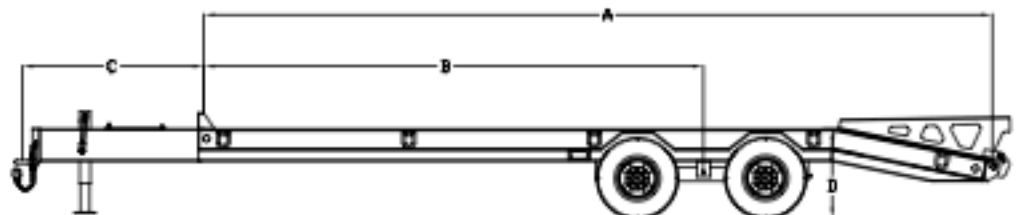

D11